

**HENDERSON COUNTY GOVERNMENT/BOARD OF EDUCATION
IS SEEKING BIDS ON THE FOLLOWING.**


<p>DESCRIPTION OF SERVICE/PRODUCT:</p>	<p>1. STEGALL ROAD PAVEMENT--STATE AID NO.3902(7) 2. WHITE FERN ROAD PAVEMENT— STATE AID NO. 3909(1) 3. EBENEZER ROAD PAVEMENT—STATE AID NO. 3939(1)</p> <p>**SPECIFIC REQUIREMENTS ARE AVAILABLE AT WWW.HENDERSONCOUNTYTN.GOV , DEPARTMENTS, BIDS OR BY CONTACTING STEVE VINEYARD, HIGHWAY SUPERVISOR</p>
<p>CONTACT FOR ADDITIONAL INFORMATION:</p>	<p>STEVE VINEYARD, HIGHWAY SUPERVISOR 731-968-2761 or wsteve820@hotmail.com</p>
<p>ADDRESS TO MAIL/BRING BIDS:</p>	<p>Henderson County Finance 17 Monroe St, 2nd Floor PO Box 495 Lexington, TN 38351</p>
<p>DATE/TIME BIDS MUST BE RECEIVED AND WILL BE OPENED:</p>	<p>September 15, 2015 8:30am</p>
<p>ADDITIONAL BID REQUIREMENTS:</p>	<p>Proof of insurance is required with the bid. In accordance with TCA 62-6-119, when a <u>construction bid</u> is in excess of \$25,000, the name, license number, expiration date and license classification of contractor must appear on the outside of the bid envelope or in the submission of the electronic bid.</p>
<p>EEO:</p>	<p>Henderson County Government/Highway/Solid Waste/ Henderson County BOE reserves the right to reject any and all bids. Henderson County Government/Highway/Solid Waste/ Henderson County BOE is an equal opportunity employer. Henderson County Government/Highway/Solid Waste/ Henderson County BOE is prohibited from discrimination based on race, color, national origin, sex, age, or disability. Complaints regarding discrimination should be filed with Director, Office of Civil Rights, 1400 Independence Av S.W., Washington, DC 20250. www.hendersoncountyttn.gov</p>



ATTACHMENT 1

CONTRACT NO. _____ **HENDERSON COUNTY**
STATE PROJECT NO. _____ **STATE AID NO. 3902(7)**
LOCAL NAME OF ROAD STEGALL RD.
TERMINI: SR-22A TO 3.72 MILES EAST OF SR-22A(PINEVIEW RD)
TYPE OF WORK: SPOT LEVEL/ RESURFACE WITH CW-MIX
PROJECT LENGTH 3.72MILES, **BRIDGE LENGTH** _____ **MILES**

Minimum Right-of-Way 50'

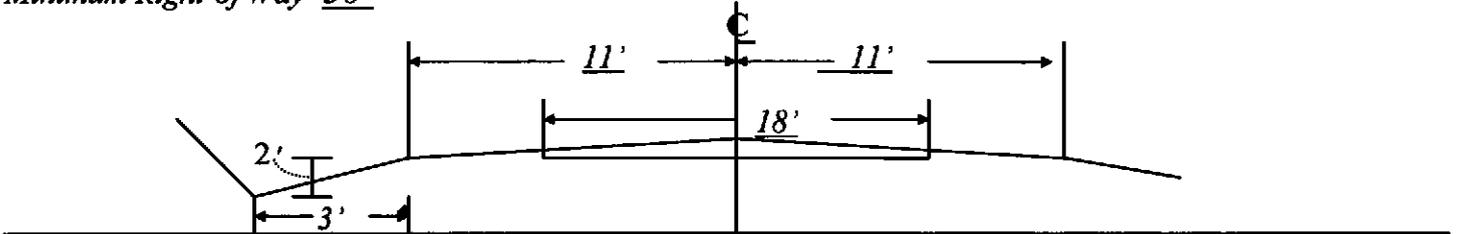

EXISTING BASE: Type: gravel Thickness 6"
EXISTING SURFACE Type: asphalt Thickness 1 & 1/4"


PROPOSED PAVEMENT SCHEDULE

(BPMB-HM) C-W MIX 165 LBS. P.S.Y
300 TONS FOR SPOT LEVELING & DRIVES

SA-3902(7)

LOCATION MAP

State Aid Form 1

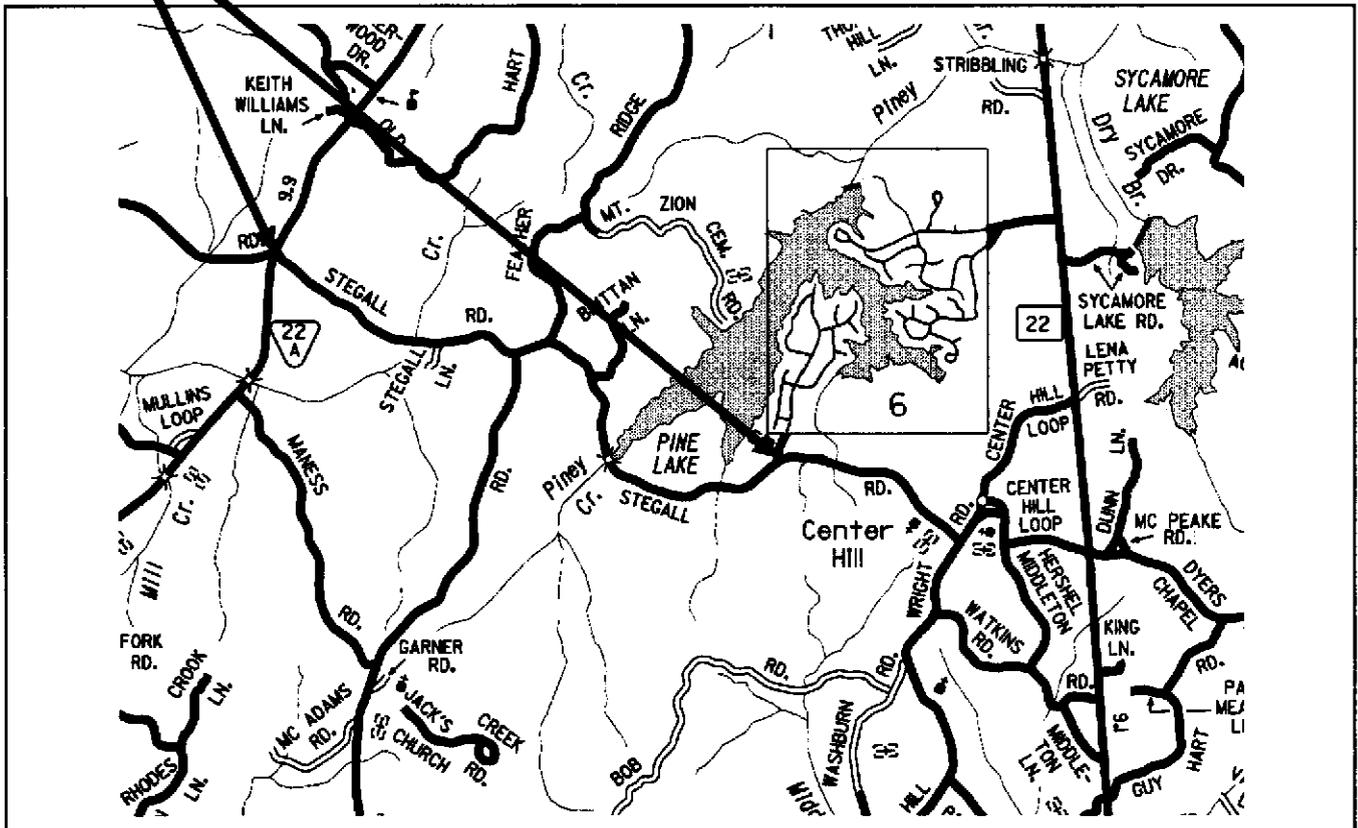




ATTACHMENT 1

CONTRACT NO. _____ **HENDERSON COUNTY**
STATE PROJECT NO. _____ **STATE AID NO. 3909(1)**
LOCAL NAME OF ROAD WHITE FERN RD.
TERMINI: MADISON COUNTY LINE TO SA-3908
TYPE OF WORK: SPOT LEVEL/ RESURFACE WITH CW-MIX
PROJECT LENGTH 3.40 MILES, **BRIDGE LENGTH** _____ MILES

Minimum Right-of-Way 50'

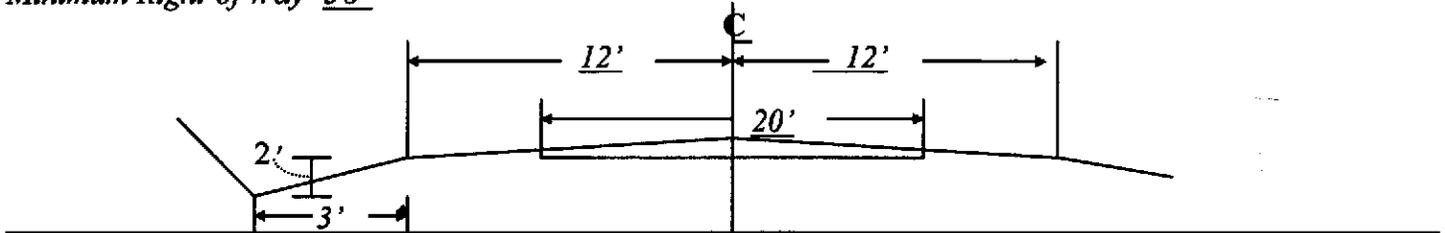

EXISTING BASE: Type: gravel Thickness 6"
EXISTING SURFACE Type: asphalt Thickness 1 & 1/4"


PROPOSED PAVEMENT SCHEDULE

(BPMB-HM) C-W MIX 165 LBS. P.S. Y
300 TONS FOR SPOT LEVELING & DRIVES

SA-3909(1)

LOCATION MAP

State Aid Form 1

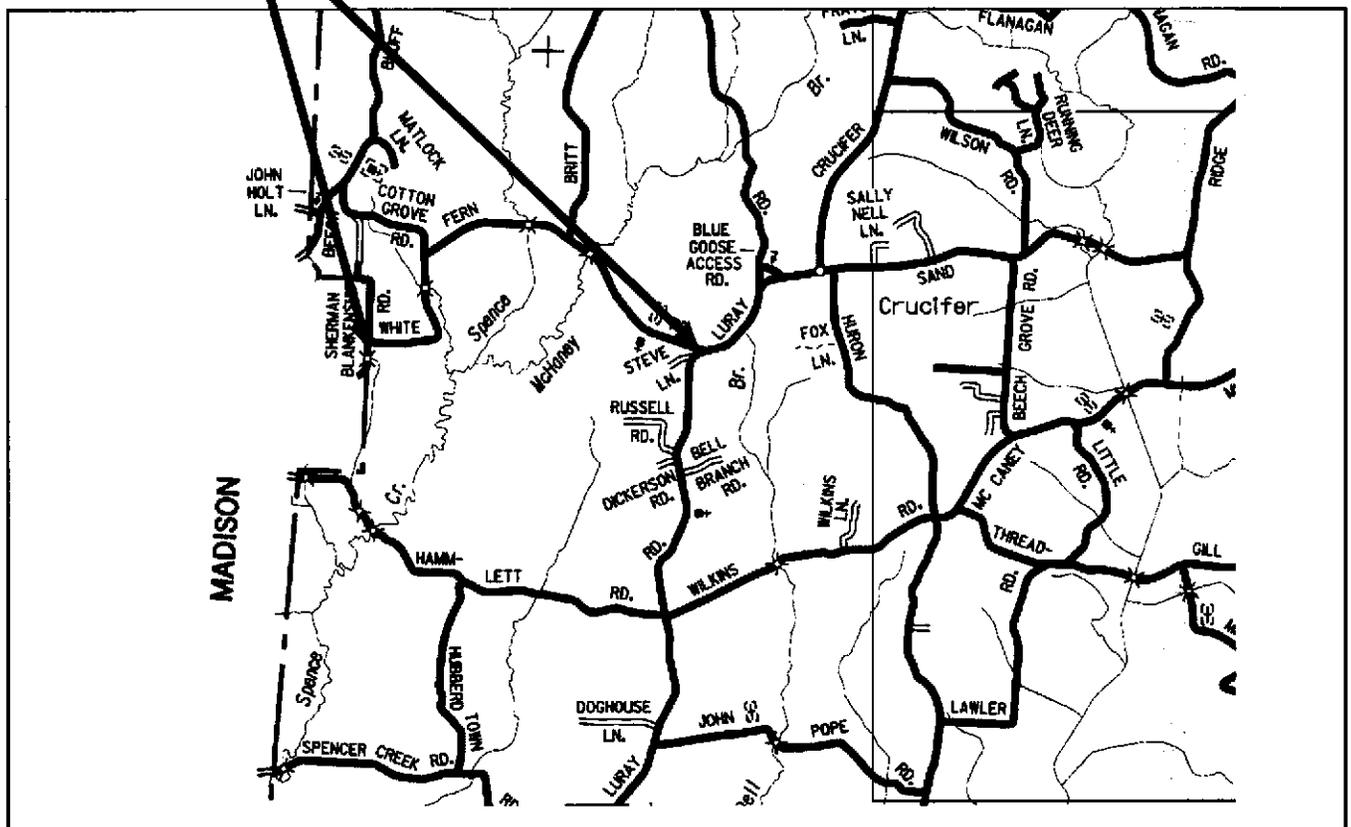

SA-3909(1)

ESTIMATED QUANTITIES

ITEM NUMBER	DESCRIPTION	QUANTITY	UNIT
*307-01.10	ASPH CONC MIX GRADE C-W	3,591	TON
716-05.01	PAINTED PAVEMENT MARKING	13.6	LM

GENERAL NOTES

THIS PROJECT IS TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION, DATED MARCH 1, 1995 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND PROPOSAL CONTRACT. ALL CONCRETE PIPE WILL BE CLASS III AND ALL C.M. PIPE WILL CONFORM TO STANDARD DRAWING D-PG-3 & 4. ALL MATERIAL TO MEET TENNESSEE HIGHWAY STANDARD SPECIFICATIONS. THE CONSTRUCTION OFFICE OF THE DEPT. OF TRANSPORTATION MUST BE NOTIFIED OF THE PLANNED START DATE (3) WORKING DAYS PRIOR TO ANY WORK BEING DONE.

NOTE: DELETE SUBSECTION 407-15 OF SPECIAL PROVISION 407, DATED 6-19-95 AND DENSITY REQUIREMENTS UNDER SUBSECTION 407-15 OF THE STANDARD SPECIFICATIONS DATED 3-1-95. HOWEVER, TWO (2) ROLLERS WILL BE REQUIRED ON THE JOB AND SUFFICIENT ROLLING WILL BE REQUIRED TO ACHIEVE GOOD COMPACTION.

NOTE: 7% OF THE INVOICE AMOUNT WILL BE RETAINED BY THE DEPARTMENT OF TRANSPORTATION PENDING COMPLETION AND FINAL INSPECTION OF PROJECT AND AN AUDIT OF THE CONSTRUCTION RECORDS BY THE REGIONAL STATE AID ROADS OFFICE.

NOTE: PRIOR TO SPREADING OF HOT MIX, A TACK COAT NOT EXCEEDING 0.02 GALLONS IS TO BE APPLIED, BUT SHALL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN CONTRACT UNIT PRICE OF OTHER ASPHALT MIXTURE.

NOTE: COST OF ANY / OR ALL REQUIRED ANTI-STRIP ADDITIVE TO BE INCLUDED IN UNIT PRICE OF OTHER ITEMS.

NOTE: SPECIFIC GRAVITY OF COMBINED AGGREGATE NOT TO EXCEED 2.80.

* INCLUDES 300 TONS FOR SPOT LEVELING

AGREED TO BY:

 STEVE VINEYARD DATE
 SUPERVISOR

APPROVED BY:

 REGIONAL TRANSPORTATION DIR. DATE

RECOMMENDED BY:

 REG. STATE AID DATE

APPROVED BY:


 MAINTENANCE DIVISION DATE



ATTACHMENT 1

CONTRACT NO. _____ **HENDERSON COUNTY**
STATE PROJECT NO. _____ **STATE AID NO. 3939(1)**
LOCAL NAME OF ROAD EBENEZER RD.
TERMINI: SR-100 TO SA-3905
TYPE OF WORK: SPOT LEVEL/ RESURFACE WITH CW-MIX
PROJECT LENGTH 4.13MILES, **BRIDGE LENGTH** _____ **MILES**

Minimum Right-of Way 50'

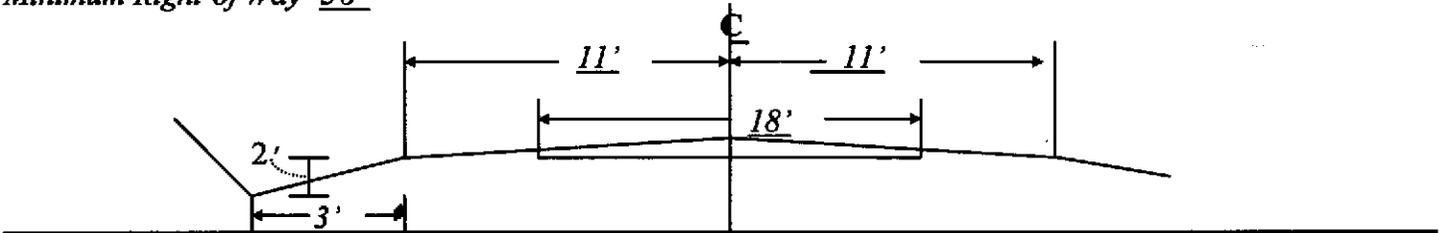

EXISTING BASE: Type: gravel Thickness 6"
EXISTING SURFACE Type: asphalt Thickness 1 & 1/4"


PROPOSED PAVEMENT SCHEDULE

(BPMB-HM) C-W MIX 165 LBS. P.S. Y
300 TONS FOR SPOT LEVELING & DRIVES

SA-3939(1)

LOCATION MAP

State Aid Form 1

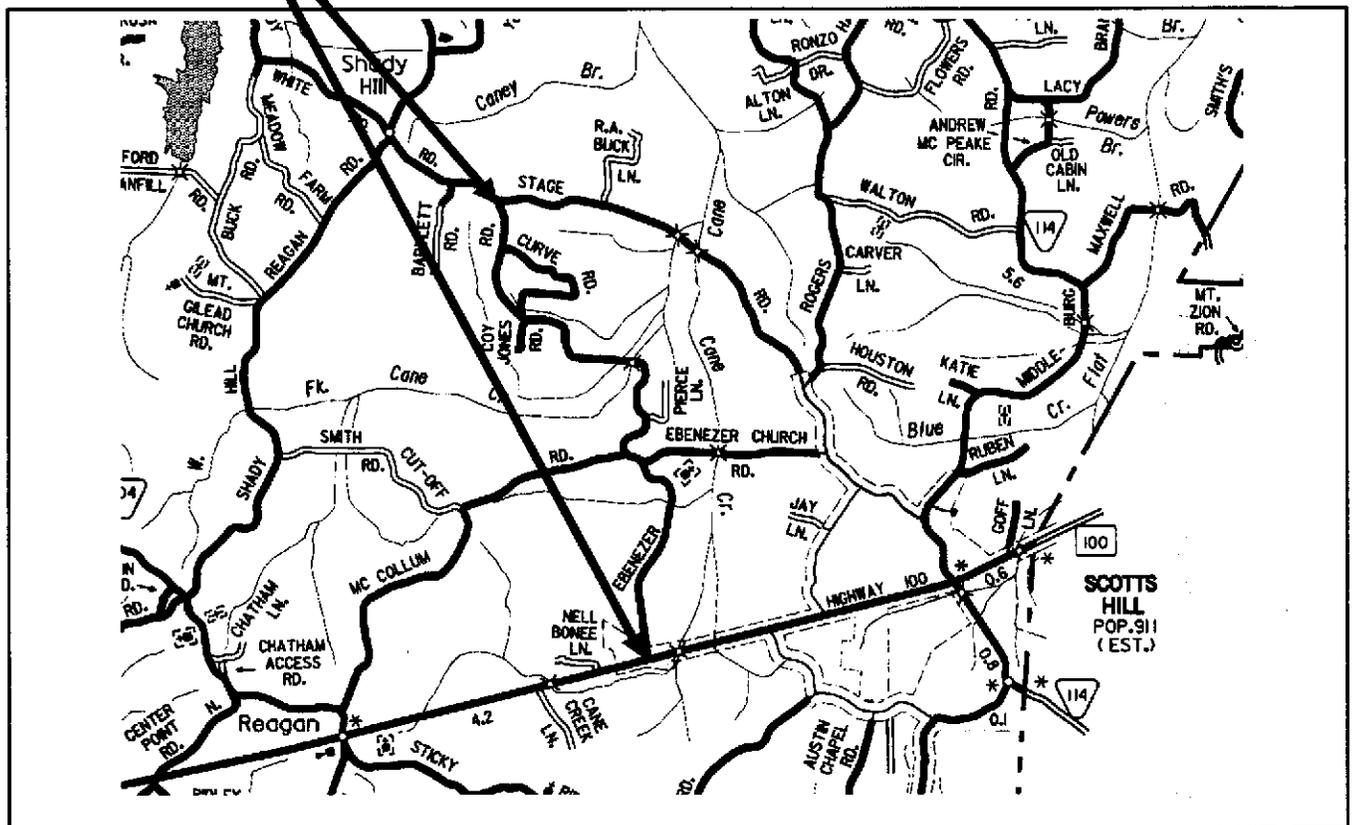

SA-3939(1)

ESTIMATED QUANTITIES

ITEM NUMBER	DESCRIPTION	QUANTITY	UNIT
*307-01.10	ASPH CONC MIX GRADE C-W	3,898	TON
716-05.01	PAINTED PAVEMENT MARKING	16.52	LM

GENERAL NOTES

THIS PROJECT IS TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION, DATED MARCH 1, 1995 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND PROPOSAL CONTRACT. ALL CONCRETE PIPE WILL BE CLASS III AND ALL C.M. PIPE WILL CONFORM TO STANDARD DRAWING D-PG-3 & 4. ALL MATERIAL TO MEET TENNESSEE HIGHWAY STANDARD SPECIFICATIONS. THE CONSTRUCTION OFFICE OF THE DEPT. OF TRANSPORTATION MUST BE NOTIFIED OF THE PLANNED START DATE (3) WORKING DAYS PRIOR TO ANY WORK BEING DONE.

NOTE: DELETE SUBSECTION 407-15 OF SPECIAL PROVISION 407, DATED 6-19-95 AND DENSITY REQUIREMENTS UNDER SUBSECTION 407-15 OF THE STANDARD SPECIFICATIONS DATED 3-1-95. HOWEVER, TWO (2) ROLLERS WILL BE REQUIRED ON THE JOB AND SUFFICIENT ROLLING WILL BE REQUIRED TO ACHIEVE GOOD COMPACTION.

NOTE: 7% OF THE INVOICE AMOUNT WILL BE RETAINED BY THE DEPARTMENT OF TRANSPORTATION PENDING COMPLETION AND FINAL INSPECTION OF PROJECT AND AN AUDIT OF THE CONSTRUCTION RECORDS BY THE REGIONAL STATE AID ROADS OFFICE.

NOTE: PRIOR TO SPREADING OF HOT MIX, A TACK COAT NOT EXCEEDING 0.02 GALLONS IS TO BE APPLIED, BUT SHALL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN CONTRACT UNIT PRICE OF OTHER ASPHALT MIXTURE.

NOTE: COST OF ANY / OR ALL REQUIRED ANTI-STRIP ADDITIVE TO BE INCLUDED IN UNIT PRICE OF OTHER ITEMS.

NOTE: SPECIFIC GRAVITY OF COMBINED AGGREGATE NOT TO EXCEED 2.80.

* INCLUDES 300 TONS FOR SPOT LEVELING

AGREED TO BY:

 STEVE VINEYARD DATE
 SUPERVISOR

APPROVED BY:

 REGIONAL TRANSPORTATION DIR. DATE

RECOMMENDED BY:

 REG. STATE AID DATE

APPROVED BY:

 MAINTENANCE DIVISION DATE

